



Anchor FLY®

The Classic Anchor for Gypsum Plasterboard



Features and Applications

- For some hollow materials : Gypsum plasterboard, drywall, gypsum ceiling, hollow brick;
- Should be used wood screws or chipboard screws;
- Anti-rotation fins prevent spinning;
- Produced in NYLON and the range of temperature: -40 °C - 80 °C;
- The anchor FLY has (3) three neck sizes for different thickness of anchor bases: FLY 2 (04 - 12,5 mm), FLY 3 (13 - 23 mm) e FLY 4 (24 - 32 mm).


Installation



The minimum length of screw = length of anchor + the thickness of fixed object + 5 mm;

For fixing objects in ceiling no exceed load 3 kgf.;

Anchor FLY with wood screw

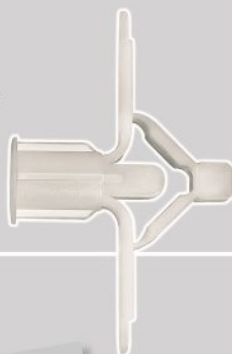

Anchor	FLY 2	FLY 3	FLY 4
Ø Hole (mm)	10	10	10
Thickness base material (mm)	4 - 12,5	13 - 23	24 - 32
Ø Screw (mm)	4,0 - 4,5	4,0 - 4,5	4,0 - 4,5
Length anchor (mm)	35	40	45



15	15	20
Drywall 12,5mm	Drywall 15mm	Drywall 25mm

Fixing RESULT



PACKING



Na hora de **fixar**  **Acerte na bucha**

For further information: www.sfor.com.br