



## Safe fixing for hollow materials and solid bases



# Anchor MU<sup>®</sup>


## multi anchor



### FEATURES AND APPLICATIONS

- For several kinds solid materials and hollow bases: concrete, perforated brick, hollow concrete blocks, etc
- Can be used with wood, chipboard and self-tapping screws ;
- Produced in NYLON and the range of temperature: -40°C to +80°C;
- Expansion in solid building materials, reliable knot formation in all cavities;
- Anti-rotation design and finned segments prevent spinning in the drill hole;
- Applications: holders, pictures, rails, electric switches, lamps, under-constructions, profiles, ...

### Installation

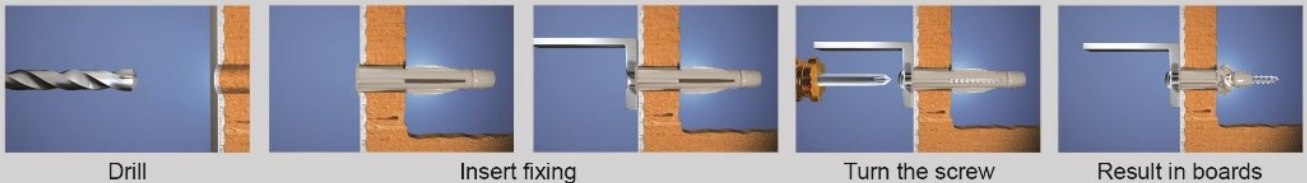

Drill

Insert fixing

Turn the screw

Result in boards



Minimum screw length = fixing length + object thickness + 5 mm;

Load capacities are determined with the largest screw  $\phi$

Anchor MU<sup>®</sup>  
with hex screw



### TECHNICAL DATA

Ø Anchor (mm)	MU 6	MU 8	MU 10	MU 12
length Anchor (mm)	36	50	60	69
Ø Screw (mm)	3,5	4,5	6,0	8,0
	4,0	5,5	8,0	10,0
	20	30	40	50
	Hollow Bases			
	40	60	100	150
	Concrete			



## ZOOM RESULT



### PACKING



Na hora de **fixar** **Acerte na bucha**

for further information: [www.sfor.com.br](http://www.sfor.com.br)